



IXIO-DT1 INDUSTRIAL

MOTION AND PRESENCE SENSOR
FOR INTERIOR INDUSTRIAL DOORS



LEARN MORE



click or scan

TECHNOLOGY




CERTIFICATIONS



DESCRIPTION

BEA's dual technology **IXIO-DT1 INDUSTRIAL** is a highly flexible and user friendly motion and presence sensor for interior industrial doors, vehicle gate detection and off-door automation.

This cutting-edge sensor has earned an impressive list of credentials and certifications, including FCC and IP54.

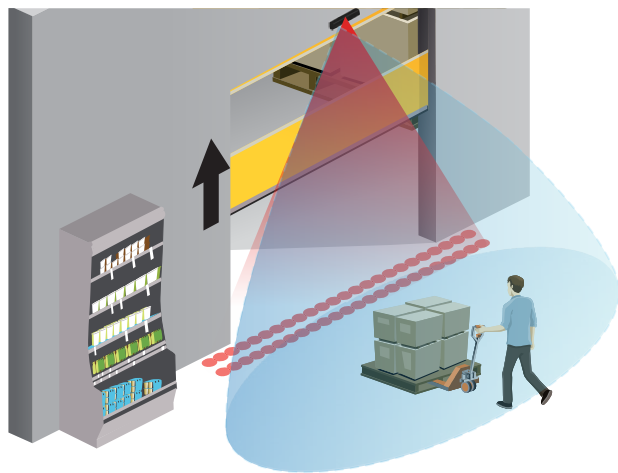

Energy Efficient

Ten microwave activation sensitivity settings and three infrared immunity settings

Enhanced Accessibility

PRM mode for applications frequently used by persons with reduced mobility (i.e. wheelchair or elderly traffic)

Precise Presence Detection

Two 24-spot, high-density, infrared curtains providing precise presence detection

Easily Adjustable


Four visible red alignment spots are projected on the ground to assist in precise IR curtain adjustment

Ease of Setup


Intelligent programming and troubleshooting via a menu-driven LCD

Standards Compliant


Fully monitored internally, capable of external monitoring

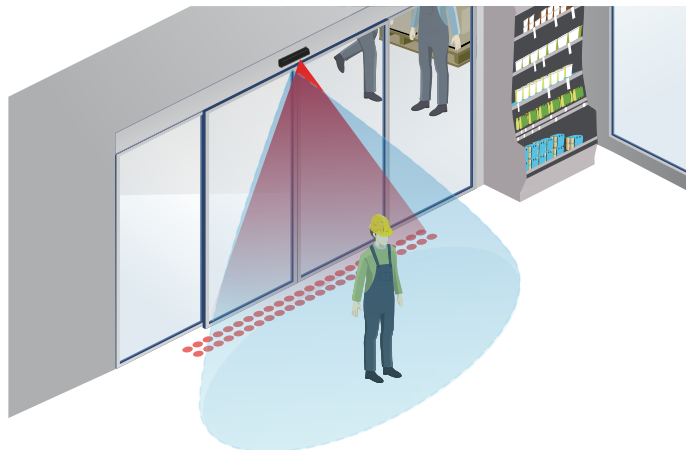

APPLICATIONS



Industrial Doors



Vehicle / Gate Detection

TECHNICAL SPECIFICATIONS

TECHNOLOGY / PERFORMANCE

Detection mode:	Motion minimum detection speed: 2 in/s	Presence typical response time: < 200 ms (max: 500 ms)
Technology:	Microwave doppler radar Transmitter frequency: 24.150 GHz Transmitter radiated power: < 20 dBm EIRP Transmitter power density: < 5 mW/cm ²	Active infrared with background analysis Spot: 2" x 2" (typ) Number of spots: max. 24 per curtain Number of curtains: 2
Mounting height:	6'6" – 11'6" local regulations may impact acceptable mounting height (pedestrian applications only)	
Sensor temperature range:	-13 – 131 °F * 0 – 95% relative humidity, non-condensing LCD screen is operational from 14 – 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.	

ELECTRICAL

Output	
Relay 1	Electromechanical relay (potential and polarity free) Max. contact current: 1 A Max. contact voltage: 30 VAC Adjustable hold time: 0.5 – 9 s
Relay 2	Solid-state relay (potential and polarity free) Max. contact current: 100 mA Max. contact voltage: 42 VDC / 30 VAC
Test/Monitoring input:	Sensitivity: Low: < 1 V High: > 10 V (max. 30 V) Response time on test request: typical < 5 ms
Supply voltage:	12 – 24 VAC ±10% 12 – 30 VDC ±10% to be operated from SELV-compatible power supplies only
Power consumption:	< 2.5 W
Noise:	< 70 dB

PHYSICAL

Degree of protection:	IP54
COMPLIANCE	
FCC certification:	FCC: G9B-100606 IC: 4680A-100606
Compliance:	ISO 13849 PL «c» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle)

PRODUCT SERIES



10IXIODT1INDUS
Dual technology sensor



10IMB
Mounting bracket adapter



10OURA
Universal rain accessory



10ICA
Flush mount ceiling adapter



10XIOSPACER
Spacer



10RETROFITSPACER
Retrofit Spacer Kit - includes spacer, 2.5" harness, and 9" harness



35.1609
Black replacement cover



10MINIBRACKET
Short adjustable mounting bracket



10REMOTE
BEA universal remote control

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM