



IXIO-DT1V

MOTION AND PRESENCE SENSOR WITH CAMERA FOR SLIDING DOORS

DESCRIPTION


BEA's **IXIO-DT1V** is the premier motion and presence sensor for sliding doors. Coupled with the dual technology, the **IXIO-DT1V** includes an NTSC-compliant video surveillance camera that provides high quality footage of those entering and exiting a building.

The **IXIO-DT1V** can be adjusted into ANSI compliance solution and has earned a comprehensive list of credentials and certifications, including FCC and IP54.

The high quality camera offers a wide field of view and is ideal for video documentation of pedestrian traffic, liability and warranty documentation, people counting and security applications, in a variety of environments.

The **IXIO-DT1V** ensures convenience, safety and energy efficiency on automatic sliding doors.


APPLICATIONS

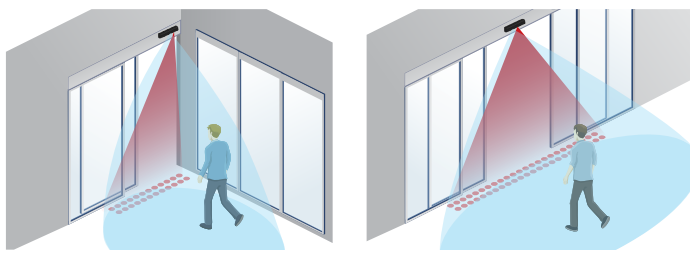

Single Slide

Dual Slide

DIMENSIONS

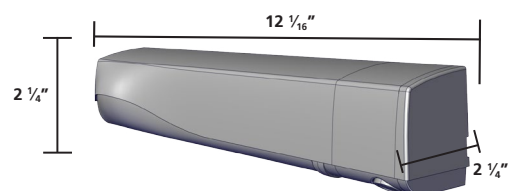

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.



TECHNICAL SPECIFICATIONS

TECHNOLOGY / PERFORMANCE

Detection mode:	Motion minimum detection speed: 2 in/s	Presence typical response time: < 200 ms (max: 500 ms)
Technology:	Microwave doppler radar Transmitter frequency: 24.150 GHz Transmitter radiated power: < 20 dBm EIRP Transmitter power density: < 5 mW/cm ²	Active infrared with background analysis Spot: 2" x 2" (typ) Number of spots: max. 24 per curtain Number of curtains: 2
Mounting height:	6'6" – 11'6" local regulations may impact acceptable mounting height (pedestrian applications only)	
Sensor temperature range:	-13 – 131 °F * 0 – 95% relative humidity, non-condensing LCD screen is operational from 14 – 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.	

ELECTRICAL

Output:	
Relay 1	Electromechanical relay (potential and polarity free) Max. contact current: 1 A Max. contact voltage: 30 VAC Adjustable hold time: 0.5 – 9 s
Relay 2	Solid-state relay (potential and polarity free) Max. contact current: 100 mA Max. contact voltage: 42 VDC / 30 VAC
Test/Monitoring input:	Sensitivity: Low: < 1 V High: > 10 V (max. 30 V) Response time on test request: typical < 5 ms
Supply voltage:	12 – 24 VAC ±10% 12 – 30 VDC ±10% to be operated from SELV-compatible power supplies only
Power consumption:	< 2.5 W
Noise:	< 70 dB

CAMERA

Voltage regulator (built into wire harness): 6.6 – 36 VDC (±10%), 6 – 28 VAC (±10%)	
Operating temperature: -22 – 140 °F (max. RH: 95%)	Video output: 1.0 (Vp-p) / 75Ω
Image Sensor: CMOS	Horizontal resolution: 480 TVL
NTSC output: 720 (H) x 480 (V)	Sync system: Inter-Sync
Frame rate: 30 fps	Minimum illumination: 0.01 LUX
AE control: auto	Gain control: auto
Electronic shutter: 1 s – 1/10,000s	S/N ratio: > 50 dB
AWB: Auto	

PHYSICAL

Degree of protection:	IP54
------------------------------	------

COMPLIANCE

FCC certification:	FCC: G98-100606 IC: 4680A-100606
Compliance:	ISO 13849 PL «C» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle)