



IXIO-DT1

MOTION AND PRESENCE SENSOR
FOR AUTOMATIC SLIDING DOORS



LEARN MORE



click or scan

TECHNOLOGY



CERTIFICATIONS





DESCRIPTION

BEA's **IXIO-DT1** is a dual technology motion and presence sensor, combining microwave activation and infrared presence detection for the automatic sliding door industry.

This solution is highly flexible and user-friendly for sliding doors, industrial doors, vehicle gate detection and off-door automation.

The **IXIO-DT1** can be adjusted into ANSI compliance and has earned a comprehensive list of credentials and certifications, including FCC and IP54.

The **IXIO-DT1** ensures convenience, safety and energy efficiency for BEA customers and end users.

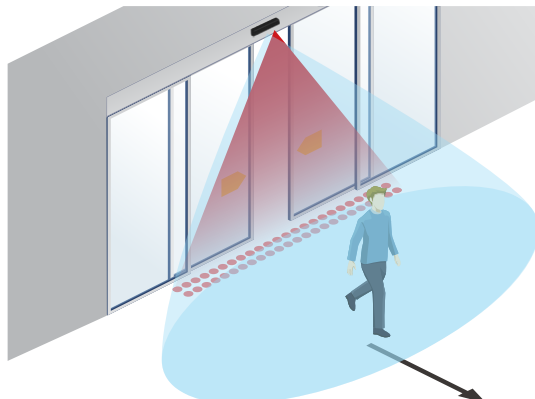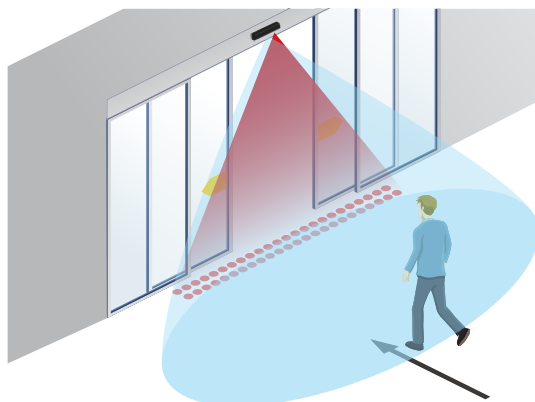

Energy Efficient

Ten microwave activation sensitivity settings and three infrared safety immunity settings

Precise Presence Detection

Two 24-spot, high-density, infrared safety curtains providing precise presence detection

Easily Adjustable

Four visible red alignment spots are projected on the ground to assist in precise IR curtain adjustment


Ease of Setup

Intelligent programming and troubleshooting via a menu-driven LCD


Standards Compliant

Fully monitored internally, capable of external monitoring

APPLICATIONS



Single Slide



Dual Slide



Dual Slide With Side Lite Protection

TECHNICAL SPECIFICATIONS

TECHNOLOGY / PERFORMANCE

Detection mode:	Motion minimum detection speed: 2 in/s	Presence typical response time: < 200 ms (max: 500 ms)
Technology:	Microwave doppler radar Transmitter frequency: 24.150 GHz Transmitter radiated power: < 20 dBm EIRP Transmitter power density: < 5 mW/cm ²	Active infrared with background analysis Spot: 2" x 2" (typ) Number of spots: max. 24 per curtain Number of curtains: 2
Mounting height:	6'6" – 11'6" local regulations may impact acceptable mounting height (pedestrian applications only)	
Sensor temperature range:	-13 – 131 °F * 0 – 95% relative humidity, non-condensing LCD screen is operational from 14 – 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.	

ELECTRICAL

Output	
Relay 1	Electromechanical relay (potential and polarity free) Max. contact current: 1 A Max. contact voltage: 30 VAC Adjustable hold time: 0.5 – 9 s
Relay 2	Solid-state relay (potential and polarity free) Max. contact current: 100 mA Max. contact voltage: 42 VDC / 30 VAC
Test/Monitoring input:	Sensitivity: Low: < 1 V High: > 10 V (max. 30 V) Response time on test request: typical < 5 ms
Supply voltage:	12 – 24 VAC ±10% 12 – 30 VDC ±10% to be operated from SELV-compatible power supplies only
Power consumption:	< 2.5 W
Noise:	< 70 dB

PHYSICAL

Degree of protection:	IP54
------------------------------	------

COMPLIANCE

FCC certification:	FCC: G9B-100606 IC: 4680A-100606
Compliance:	ISO 13849 PL «c» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle)

PRODUCT SERIES



10IXIODT1
Dual technology sensor



10IMB
Mounting bracket adapter



10OURA
Universal rain accessory



10CDA
Curved door accessory



10XIOSPACER
Spacer



10ICA
Flush mount ceiling adapter



10RETROFITSPACER
Retrofit Spacer Kit - includes spacer, 2.5" harness, and 9" harness



20.5302
Retrofit harness



35.1609
Black replacement cover



10REMOTE
BEA universal remote control

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



www.gateopenersafety.com | 1(800)-878-7829 | sales@gateopenersafety.com

A **Halma** company