

EN

JAMB PUSH PLATES

STAINLESS STEEL ACTUATORS




LEARN MORE



click or scan

DESCRIPTION

BEA's **JAMB PUSH PLATES** improve overall door access, enhance accessibility for those with limited mobility or disabilities and seamlessly integrate with an automatic door's activation. **JAMB PUSH PLATES** can be mounted in areas with limited space available, such as on guide rails. These push plates may be hard wired to the door operator or connected to BEA's line of wireless transmitters.

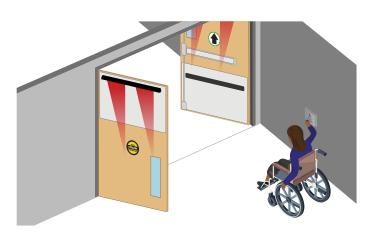



Robust Design

1/16 inch thick stainless steel for maximum durability

Vandal Resistant Concealed fasteners to minimize vandalism

Available In Complete Kits

Complete kits available including plates, mounting boxes and optional wireless devices for ease of ordering

Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

Highly Compatible And Customizable

Compatible with both surface and flush mount boxes; various text, graphic and logo options available

APPLICATIONS



Low Energy Doors

PRODUCT SERIES

10PBJMS1

handicap logo (microswitch, hardwired only)

10BOXJAMBST

"Push to Open" text &



Wireless Compatibility

PBJMS series surface mount box (hardwired only) (1 $3\!\!\!\!/4'' \times 4 \prime\!\!\!/_2'')$

10PBJMSLL

Handicap logo only

(microswitch, hardwired only)

Request-To-Exit

TECHNICAL SPECIFICATIONS

16 gauge, 304 2B stainless steel
¼″ thick, aluminum
Stainless steel, 6-32 × 1″ & 8-32 × 1″ Allen head size: 5⁄64
Single-pole, 15 A, COM / NO / NC, UL recognized
900, 433, or 300 MHz
1 ³ / ₄ " (W) × 4 ¹ / ₂ " (H) × ³¹ / ₅₀ "(D)

PRODUCT SERIES



10PBJ1B

"Push to Open" text & handicap logo, white text on blue plate

PBJ / PBJM series flush mount box (1 $\frac{1}{2}'' \times 4 \frac{3}{4}'')$

PBJ / PBJM series surface mount box (1 1/2" × 4 3/4")

(4	3/4″	×	1	¹ /2")
	_			

 $(4^{1/2''} \times 1^{3/4''})$

10PBJSREV

braille

"Push to Slow" text with





TECHNICAL SPECIFICATIONS

Faceplate Material	16 gauge, 304 2B stainless steel
Backplate Material	1⁄8" thick, aluminum
Mounting Screws	Stainless steel, 6-32 × 1" & 8-32 × 1" Allen head size: ‰
Cherry Switch	Single-pole, 15 A, COM / NO / NC, UL recognized
Compatible Wireless Frequencies	900, 433, or 300 MHz
Faceplate Dimensions	1 ½" (W) × 4 ¾" (H) × ³ ½0"(D)

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the 79.0075.09 • 20231003 right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM

