



LZR®-FLATSCAN 3D SW

FOUR CURTAIN STAND-ALONE,
DOOR-MOUNTED SAFETY SYSTEM WITH
VIRTUAL PUSH BUTTON FUNCTIONALITY

DESCRIPTION

BEA's **LZR-FLATSCAN 3D SW** is a four-curtain, door-mounted, safety system for automatic swing doors. Using LASER Time-of-Flight technology, its three-dimensional detection field guarantees full-safety coverage of the opening area. Ideal for environments in healthcare, education, and commercial settings.

The deep detection pattern reduces sudden door movements, preventing contact as a person walks through the doorway, benefitting individuals with limited mobility, and reducing the wear and tear of the door. Additional safety features include Leading Edge Safety for detection beyond the door leaf and coverage of the hinge area with Finger Detection Technology™.


Technicians can reduce installation and setup time with Hand Gesture Setup and the built-in knowing act device. Instead of coordinating and wiring activation devices, utilize Virtual Push Buttons for a non-contact form of door activation. Convenient in settings that rely on hygienic solutions, like surgical environments.

The **LZR-FLATSCAN 3D SW** is capable of exceeding the 156.10 section 8.2.2.3 standard for detection area and meets section 8.1.4 for monitoring.

APPLICATIONS




Low Energy



Double Swing

DIMENSIONS

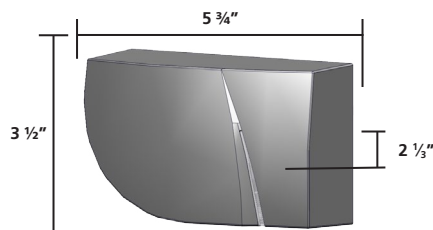

TECHNICAL SPECIFICATIONS

TECHNOLOGY / PERFORMANCE

Technology	LASER scanner, time-of-flight measurement
Detection mode	Presence
Max. detection range	13' (diagonal) with reflectivity of 2% e.g. at 5' width, max. H = 12'
Recommended mounting height	75 – 98"
Opening angle	Door leaf safety: 80° Pinch zone safety: 20°
Angular resolution	Curtain 1: 0.2° Curtain 2: 1° Curtain 3: 1.7° Curtain 4: 2.5°
Tilt angles	0 – 5°
Typ. min. object size	3/4" @ 13' in curtain C1
Min. door leaf speed	2"/sec
Emission characteristics (IEC 60825-1)	IR LASER: wavelength 905 nm; output power < 0.1mW; Class 1

ELECTRICAL

Supply voltage *	12 – 24 VDC ±15% (to be operated from SELV-compatible power supplies only)
Power consumption	< 2 W
Response time	Typ. <120 ms (max. 220 ms)
Output	3 electronic relays (galvanic isolation - polarity free)
max. switching voltage	42 VAC/VDC
max. switching current	100 mA

PHYSICAL

Dimensions	5 3/4" (L) x 3 1/2" (H) x 2 1/3" (D) mounting base: D + 3/4" spacer: D + 1 1/2"
Material - Color	PC/ASA - black
Protection degree	IP44 (IEC 60529)
LED signals	1 RGB LED: detection/output status
Temperature range	-13 – 140 °F
Humidity	0 – 95% non-condensing
Vibrations	< 2 G

COMPLIANCE

Compliance	ISO 13849-1 PI "d"/ CAT2; IEC 60825-1; IEC 62061 SIL 2 UL10 – file # R39071
-------------------	--

* This sensor is powered by DC voltage only. If only VAC power is available, a 12V transformer paired with a rectifier must be used. Do not use a 24V transformer and rectifier as this will cause damage to the product.

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



www.gateopenersafety.com | 1(800)-878-7829 | sales@gateopenersafety.com

A Halma company