Two Bridge 12V Kit



- Power and door control solution for 12V
- Includes two Sure-Fi SFK-DS004 Wiegand Bridge System
- Connect to any local power, 85 - 305Vac range
- 12Vdc 5.0A power supply
- 12Vdc battery charger/UPS (batteries not included)

Sure-Fi Wiegand Wireless Bridge


Works with any Wiegand protocol up to 64 bits

1 Wiegand inputs


2 relay Outputs (Wet or Dry)
Request to exit input (REX)



Top View

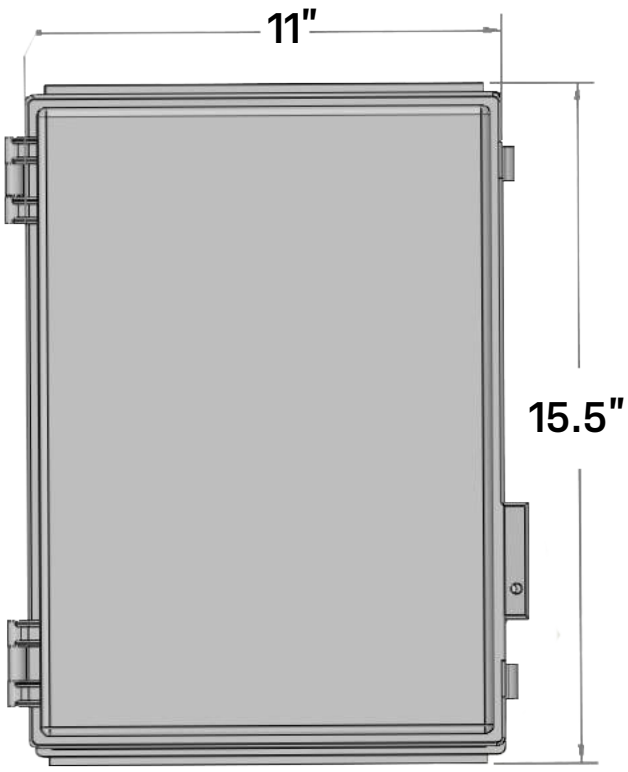

Side View

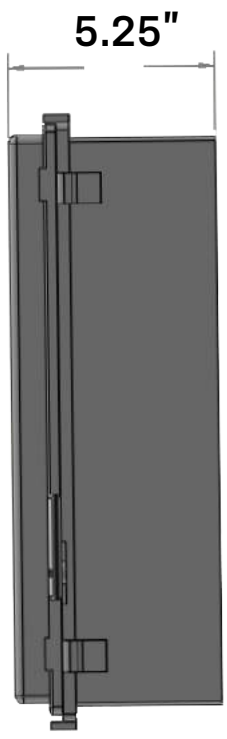

SPECIFICATIONS

Enclosure

- 15.5"x 11"x 5.25"
- UL-50 / cUL Listed enclosure
- NEMA Type 3, 3R, 3S, 4, 4X, 6/6P, 12 & Marine Use IP68 enclosure

Power

- 12Vdc 5.0A / 24VDC 2.5A power supply
- Input Voltage 85-305Vac
- Max Power 60 Watts
- 12VDC battery chargers / UPS (batteries not included)