




# R2E-100

FOCUSED ACTIVE INFRARED  
REQUEST-TO-EXIT SENSOR

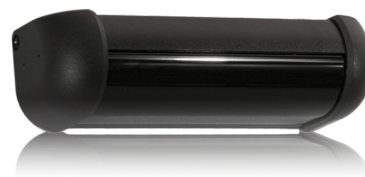

## LEARN MORE



click or scan

## TECHNOLOGY



## CERTIFICATIONS



## DESCRIPTION

BEA's UL Listed **R2E-100** is a request-to-exit sensor with an active infrared (AIR) detection zone focused directly on the door handle. This allows the **R2E-100** to only detect people intending to exit through the door as they reach for the door handle.

The AIR based **R2E-100** improves accuracy of detection as compared to passive infrared (PIR) technology including ground based errors, PIR sensor spoofing, known PIR vulnerabilities (hot air, background objects, cross traffic).



## Standards Compliant

UL 294 / ULC S319 Listed

## Define Your Tilt Angle

Adjustable tilt angle from 0 – 10°

## Customizable Detection Zones

Adjustable detection range from 20 – 48 inches\*

## Low Profile Mounting

Low profile sensor mounts on or above the door frame

## Multiple Inputs

Three DRY auxiliary inputs: a push button or other request-to-exit device, a card reader or other request-to-enter device, and a door position switch

\*The R2E-100 can accommodate swinging doors up to 7 feet

## APPLICATIONS



Request-To-Exit

## TECHNICAL SPECIFICATIONS

<b>Detector Type</b>	Focused Active Infrared
<b>Supply Voltage</b>	12 – 24 VAC / VDC; $\pm 10\%$ @ 60 Hz
<b>Current</b>	
Sounder OFF	155 mA
Sounder MAX VOLUME	200 mA
<b>Temperature (UL Install)</b>	32 – 120 °F (0 – 49 °C)
<b>Temperature</b>	-20 – 120 °F (-29 – 49 °C)
<b>Humidity</b>	
(ULC S319 Installation)	0 – 93% non-condensing
(UL 294 Installation)	0 – 85% non-condensing
<b>Detection Range</b>	20 – 48", adjustable via potentiometer
<b>Relay</b>	2 Form "C" contact sets; 1.3 A @ 24 VAC / 30 VDC
<b>Relay Hold Time</b>	0.5 – 60 s, adjustable via potentiometer
<b>Sounder</b>	85 dB max, adjustable volume
<b>Indicator LEDs</b>	Green, Red, Yellow, Orange
<b>REX Input</b>	DRY contact, NO
<b>Card Reader Input</b>	DRY contact, NC
<b>Door Position Switch Input</b>	DRY contact, NO
<b>Dimensions</b>	6 $\frac{7}{10}$ " (W) $\times$ 1 $\frac{7}{10}$ " (D) $\times$ 2" (H)
<b>Material</b>	Plastic (ABS and PC)
<b>Wiring Interface</b>	JST (14-pin) with 4' cable
<b>Norm Conformity</b>	UL 294 / ULC S319 FCC Part 15 B

## PRODUCT SERIES



**10R2E-100**  
Focused active  
infrared sensor

**DISCLAIMER** Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

[WWW.BEASENSORS.COM](http://WWW.BEASENSORS.COM)



[www.gateopenersafety.com](http://www.gateopenersafety.com) | 1(800)-878-7829 | [sales@gateopenersafety.com](mailto:sales@gateopenersafety.com)

A **Halma** company