



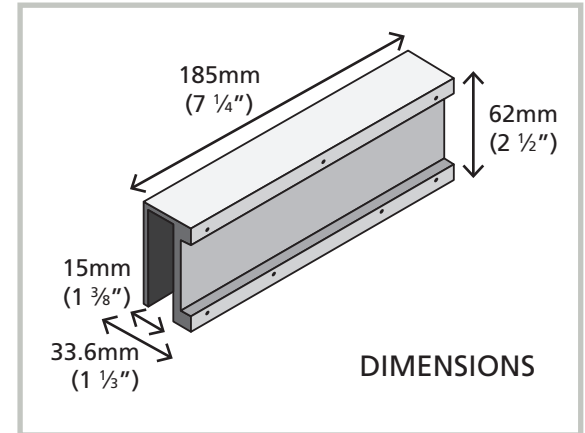

Visit website for available languages of this document.


U BRACKET

Glass door mounting kit for MAGLOCKS

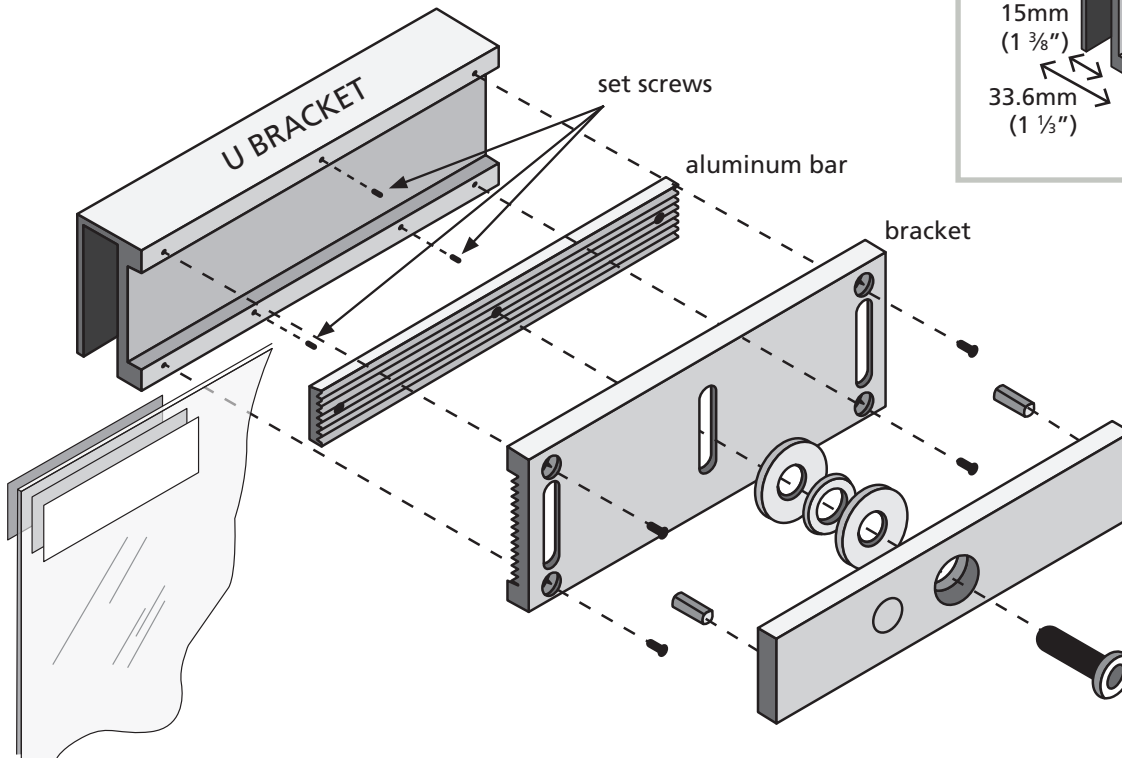

1. Place the steel bushing and rubber bushing according to the drawing.
2. Use the 3 set screws to clamp the glass firmly. A suitable threadlock should be applied to all fixing screws.
3. Insert the aluminum bar and attach armature plate. The aluminum bar can be adjusted so that it matches the MAGLOCK.

NOTE: Do not overtighten the mounting screw of the armature plate. Allow floating movement for maximum holding force.

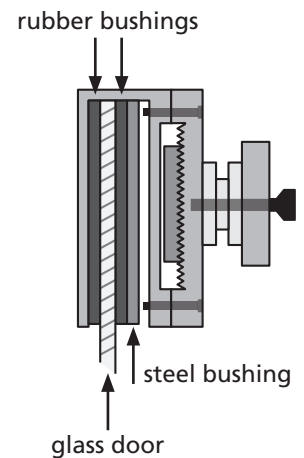

BEA, INC. INSTALLATION/SERVICE COMPLIANCE EXPECTATIONS

BEA Inc., the sensor manufacturer, cannot be held responsible for incorrect installations or incorrect adjustments of the sensor/device; therefore, BEA Inc. does not guarantee any use of the sensor/device outside its intended purpose.

BEA Inc. strongly recommends that installation and service technicians be AAADM-certified for pedestrian doors, IDA-certified for doors/gates, and factory-trained for the type of door/gate system.

Installers and service personnel are responsible for executing a risk assessment following each installation/service performed, ensuring that the sensor/device system performance is compliant with local, national, and international regulations, codes, and standards.

Once installation or service work is complete, a safety inspection of the system shall be performed and documented per the manufacturer's recommendations or industry guidelines. Examples of compliance may apply to ANSI 156.10, ANSI 156.19, ANSI/DASMA 102, ANSI/DASMA 107, UL294, UL325, and International Building Code.

Tech Support: 1-800-407-4545

Customer Service: 1-800-523-2462

General Tech Questions: techservices-us@BEAsensors.com
www.BEAsensors.com



A Halma company