



BODYGUARD-T

OVERHEAD PRESENCE SENSOR
FOR AUTOMATIC DOORS


DESCRIPTION

BEA's **BODYGUARD-T** is an overhead presence sensor designed for pedestrian automatic doors.

The **BODYGUARD-T** provides threshold protection during the door open state. It is designed to prevent a closed door from opening and an open door from closing when a person is in the detection zone.

This sensor is easy to install and adjustments can be made by using the BEA remote control.

APPLICATIONS

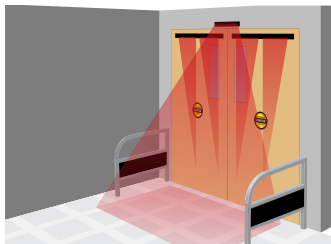

Double swing




Single swing



TECHNICAL SPECIFICATIONS

Technology	Active Infrared
Detection Mode	Presence
Installation Height (variable)	9' 0" maximum (recommended: 6' 6" – 8' 0")
Mounting Angles	
Bodyguard Only	5°, 10° (factory default setting: 5°)
With Bodymount	0°, 5°, 10°
Power Supply	12 – 24 VAC / VDC ±10%
Frequency	50 – 60 Hz
Output	
Max. Contact Voltage	60 VDC / 125 VAC
Max. Contact Current	1 A
Max. Power Supply	30 W (DC), 60 VA (AC)
Relay Hold Time	0.5 – 9 s
Operating Temperature	-22 – 140 °F
Immunity	Immune to electrical and radio frequency interference
Cable	4'
Weight	1 lb 11 oz
Dimensions	12" (W) x 2" (H) x 2" (D)
Material	Aluminum & ABS plastic
Housing	Black anodized aluminum

DIMENSIONS

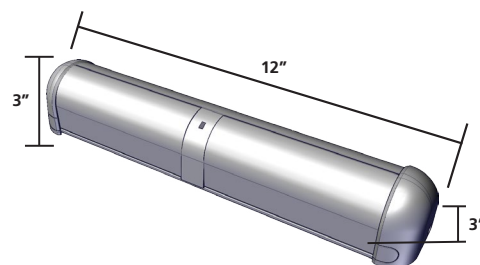

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



www.gateopenersafety.com | 1(800)-878-7829 | sales@gateopenersafety.com

A **Halma** company