

SELECT PRO WELD IN DEADLOCK

SPECIFICATION SHEET

SWD

- Stainless steel deadbolt which moves 30mm (1-1/8") with one turn of the key.
- Deadbolt is adjustable on length for precise fitting on site.
- Lockcase made of 2.5mm (1/8") steel.
- Very easy to fit and comes in four widths.




PRODUCT DETAILS

Product code:	Description:
SWD1630	For 30mm (1-1/8") wide gate frames
SWD1640	For 40mm (1-5/8") wide gate frames
SWD1650	For 50mm (2") wide gate frames
SWD1660	For 60mm (2-3/8") wide gate frames

Deadbolt: Adjustable, moves 30mm (1-1/8").

Can be used for both left and right handed gates.

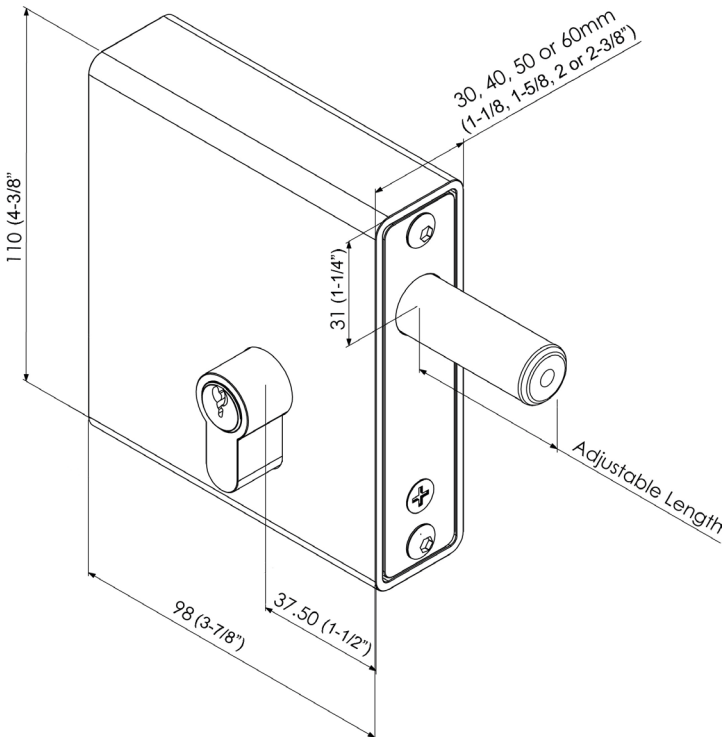

INSTALLATION

- Disassemble the lock by removing the 3 screws from the face plate of the lock, remove the face plate, and then remove the euro cylinder (twist the key 15 degrees clockwise or anti-clockwise to release). The insides of the lock will then slide out.
- Weld the lockcase to the gate and galvanise or paint as part of the gate.
- Fit the lock and eurocylinder into the lockcase and secure with screws.
- MAINTENANCE** Every two months, lubricate the latchbolt with light oil. Annually, dismantle lock and spray the mechanism inside with light oil.

